



MASONRY GROUT WINDOW

Permits clean out of debris.

Also allows for inspection and monitoring of grout placement.



After grout placement, acrylic window can be removed by merely twisting and breaking off the exposed portion of the engineered plastic bolt.
That's it! No hammers! No wrenches! No Grinding!

When properly used there is no damage to face of block or repairs due to bow outs.

Can be installed quickly and removed even faster saving on labor.

Acrylic window and nut is reusable, thus providing even greater savings.

While the nut and window are reusable, the exposed portion of the GW-BOLT easily breaks off after removal of the nut and window to provide a fast, clean, professional and economical means of forming reinforced masonry clean-out covers.

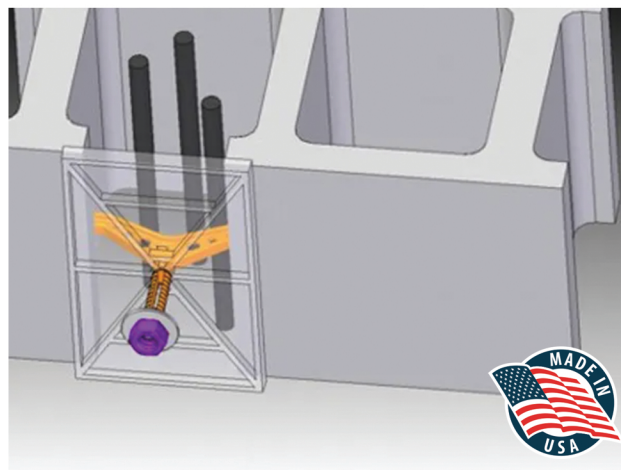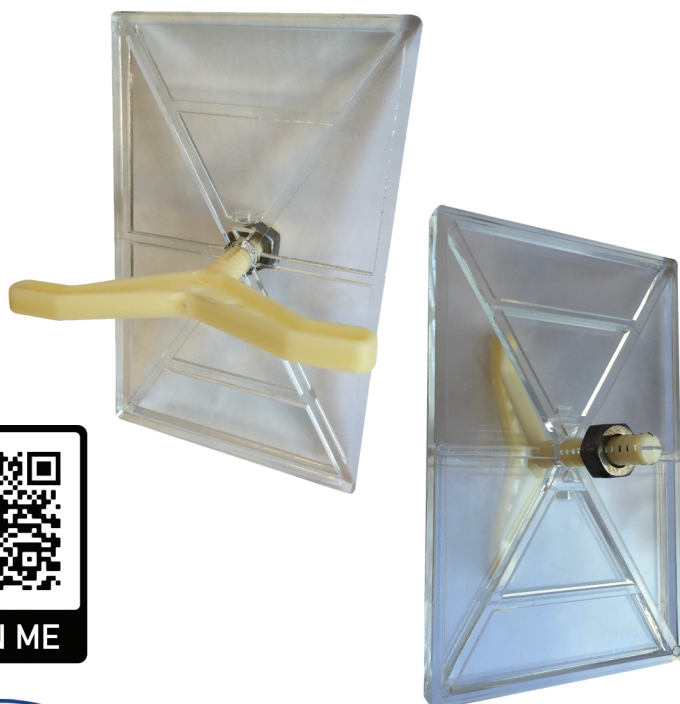

CAT#: GW-1A

Window

CAT#: GW-BOLT

Bolt & Nut (20 sets)



www.deslinc.com



800-743-4106



/DeslauriersInc